



- Engineered by beer-industry experts for performance and value.
- Digital thermostat for accurate glycol bath temperature.
- Space saving compact dimensions.
- Low noise, quiet running performance.



**MMPP4300-SF**



### Feature

**CE** Declaration of Conformity.

# Specifications

Micro Matic reserves the right to change specifications without notice.




Part No.	Description	Shipping Weight	Box Dimensions
<input type="checkbox"/> <a href="#">MMPP4300-SF</a>	Air Cooled	43 kg	762mm L x 584mm W x 610mm H
		93 lbs	30"L x 23"W x 24"H

# Operating Performance

<b>Compressor</b>	1/3 HP
<b>BTU per hour</b>	3047
<b>Plug Type (NEMA #)</b>	5-15P
<b>Voltage</b>	115
<b>Running</b>	500W
<b>Refrigerant</b>	R-134a
<b>Charge</b>	TBD
<b>Bath Capacity</b>	17 litre (4.5 Gallons)
<b>Pump Type</b>	Vertical
<b>Inlet John Guest:</b>	9.52mm (1/2" O.D.)
<b>Outlet John Guest:</b>	9.52mm (1/2" O.D.)

# Dimensions

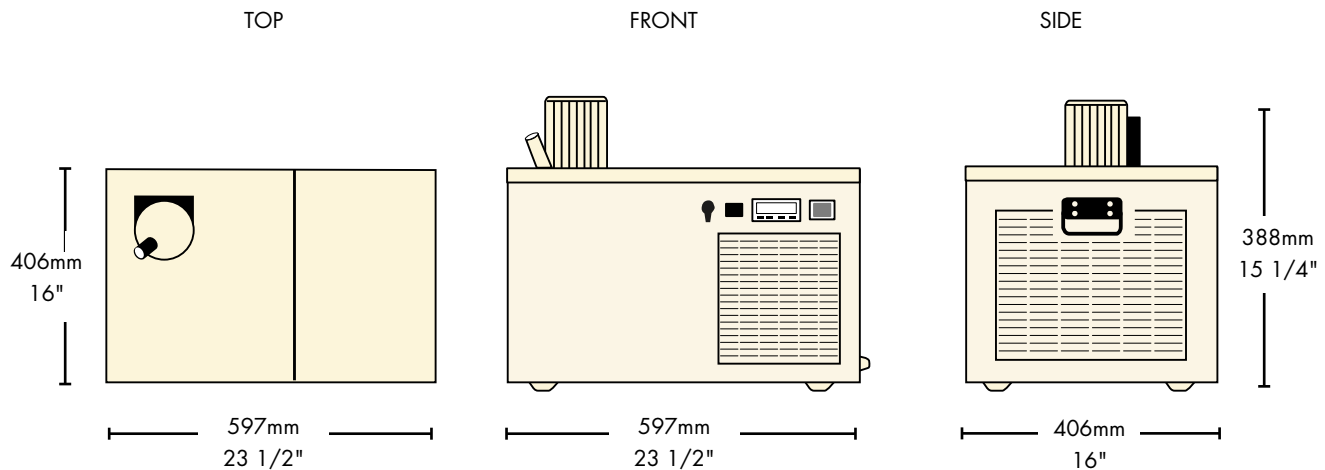

Copyright ©2010 Micro Matic USA, Inc. All Rights Reserved.

000827-D0410



[www.micromatic.com](http://www.micromatic.com)

Toll Free: 1-(866) 327-4159

West	Central	Southeast	Northeast
19791 Bahama Street Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844	10726 North Second Street Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363	2364 Turbine Court Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429	4601 Saucon Creek Road Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466