



- Engineered by beer-industry experts for performance and value.
- Digital thermostat for accurate glycol bath temperature.
- Insulated cabinet maintains glycol temperature while minimizing condensation.
- Exterior sight glass to verify glycol bath level.



[MMPP4301-EP](#)



Feature



Specifications

Micro Matic reserves the right to change specifications without notice.




Part No.	Description	Shipping Weight	Box Dimensions
<input type="checkbox"/> MMPP4301-EP	Air Cooled	53 kg	660mm L x 457mm W x 558mm H
		118 lbs	26"L x 18"W x 22"H

Operating Performance

Compressor	1/3 HP
BTU per hour	2,300
Plug Type (NEMA #)	5-15P
Voltage	115
Running	7.0A
Refrigerant	R-134a
Charge	.28 kg (10 oz)
Bath Capacity	19 litre (5 Gallons)
Pump Type	Vertical
Inlet Barb:	9.52mm (3/8")
Outlet Barb:	9.52mm (3/8")
Cabinet Cover	Included

Dimensions

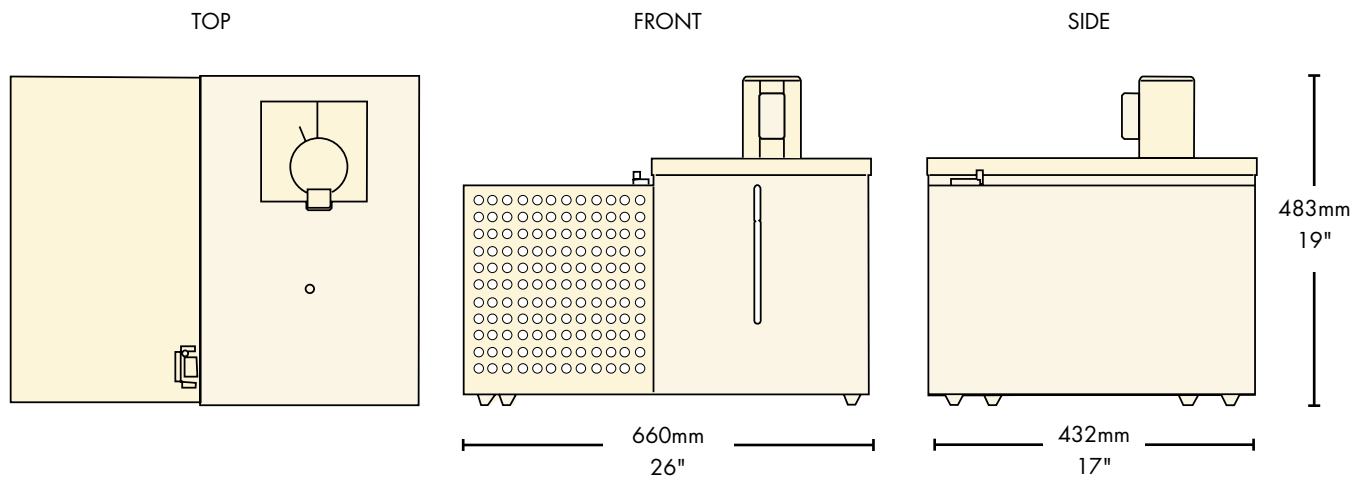

Copyright ©2010 Micro Matic USA, Inc. All Rights Reserved.

00015D0210



www.micromatic.com

Toll Free: 1-(866) 327-4159

West	Central	Southeast	Northeast
19791 Bahama Street Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844	10726 North Second Street Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363	2364 Turbine Court Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429	4601 Saucon Creek Road Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466